

LD620C/LD625C

Brilliant multifunctional design

Energize your operations, add impact to documents and make everyone who uses this system significantly more productive




The Truly Productive Choice

Today, organizations run lean and employees are expected to be smart, fast and versatile. The same holds true for MFPs. The LANIER® LD620C/LD625C gives you all of that—and more. Powerful management tools make it easy to build and maintain highly productive workflows to streamline your document-related processes. Plus, a host of physical and logical security features give you multiple ways to protect your documents and your data. Exceptional performance from features such as internal finishing makes it a perfect system for centralized printing environments—so you can get rid of the hassle and expense of multiple personal printers and produce professional quality documents in-house.

Smart System, Sustained Savings


The combination of timesaving technology and proven reliability all add up to an exceptionally low total cost of ownership.

- Keep every job on the fast track with reliable print speeds of up to 25 pages per minute.
- Use the productive duplexing feature to print two-sided documents. Get the double advantage of greatly reduced paper costs and more efficient document filing.
- Use less power without changing workflow. The innovative new color Quick Start-up (QSU) fusing system heats up quickly, using less electricity to do the same work and allows faster recovery time of less than 10 seconds from sleep mode where it only consumes 1 watt. All this leads to one of the lowest Typical Electricity Consumption (TEC) values in the industry.

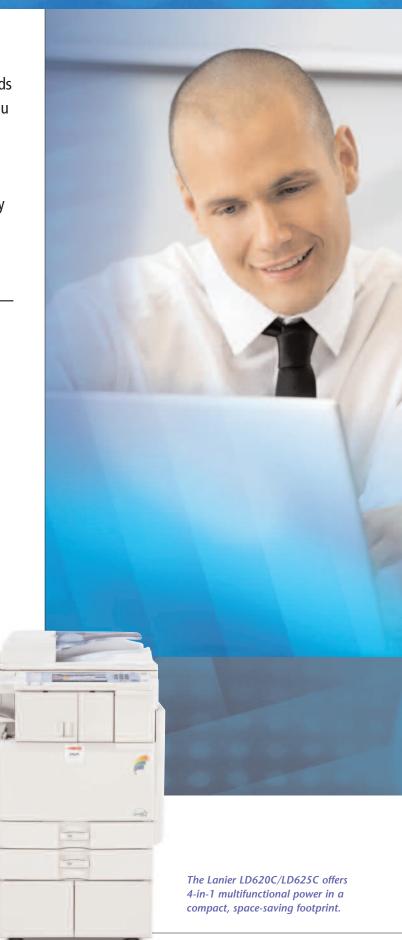

LD620C/LD625C





Scan a document and preview it on the convenient LCD color display panel before sending it to your pre-selected destination.

Simplify Every Job for End-Users

Every task, from advanced scanning capabilities to paper replenishment, is fast and easy. End-users spend less time creating and managing documents and more time focusing on what they do best—helping you grow your business.

- Conserve valuable office space with a compact system that can be configured to meet your specific needs. You can even add in-line finishing capabilities with just a minimal increase to the system's footprint.
- Manage simple tasks or complex jobs easily with the 8.5" fullcolor LCD display. The intuitive display allows users to preview stored documents for accuracy prior to printing—and view animated guidance for operational assistance.
- Replenish paper and supply items quickly with a user-friendly design that includes overhand/underhand grips on paper trays and simplified, single-handed toner replacement.

True Simplicity Meets Real Power

The Lanier LD620C/LD625C offers the intelligence and processing power you need for fast, efficient and affordable network printing.

- Complete jobs of all sizes faster and easier with a 600 MHz processor, 1.5 GB RAM and a 160 GB Hard Disk Drive.
- Streamline and simplify print jobs with icon-driven Lanier oneclick, preset PCL6/PS3 user interface drivers as well as XPS and optional genuine Adobe® PostScript®3™ drivers.
- Build a powerful, reliable network of Lanier's LD620C/LD625C with seamless integration for Windows, Macintosh, UNIX, AS/400 and other environments. Standard 10Base-T/100Base-TX Ethernet, USB 2.0 and SD Slot interfaces, as well as optional Gigabit Ethernet and wireless connectivity, are also available.

Handles Any Job, Fits in Any Workspace

A System Designed to Exceed Expectations

The Internal Shift-Sort Tray (optional) separates finished sets for easy pickup and delivery.



Create professionally finished documents completely in-house with the **500-Sheet Internal Finisher** and optional 2 & 3-hole punching.



Frint Jobs

Select Jobfol).

All Jobs.

File Name

File Name

All Jobs.

All


Locked (Secure) Print lets users delay document printing until they enter a password at the device.



Load scanned documents onto portable media using Scan-to-Media capabilities with the **USB/SD card slot (optional)**. Print TIFF, PDF or JPEG files from the removable media.

Choose the 1 x 500-Sheet Paper Bank (optional) or a larger 2 x 500-Sheet Paper Bank (optional/shown) which boosts paper capacity to 1,600 sheets. Up to five different paper sizes and orientations can be loaded for maximum flexibility.

Lanier LD620C/LD625C

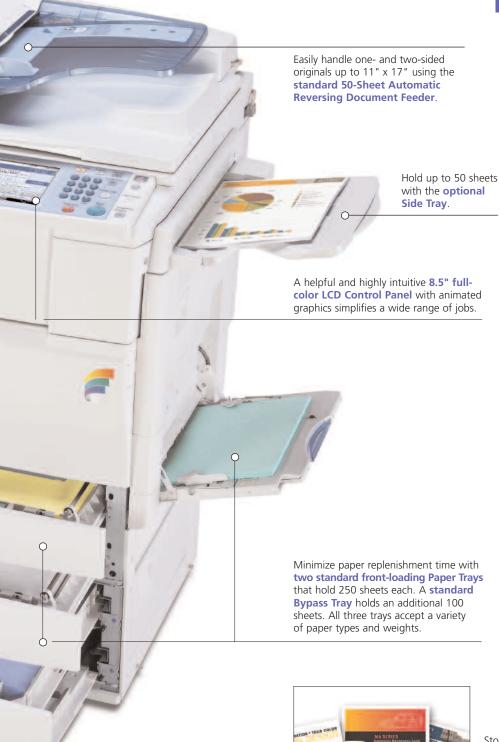




Dramatically reduce paper usage with standard automatic two-sided (duplex) output.



Lanier's energy-saving PxP™ toner produces brilliant color output for your business documents.



Intelligent Document Management

Sophisticated Features, Smart Investment

The Lanier LD620C/LD625C offers powerful features that are typically found on larger, more expensive systems. It's an affordable way to energize your document-related processes.

- Send scanned documents to any e-mail address at the touch of a key with Scan-to-Email. No dedicated servers or additional software are required.
- Save documents on a shared server for fast, easy distribution with a productive Scan-to-FTP feature. You can also send scanned documents to a local server for intelligent archiving with Scan-to-Folder.
- Scan or print documents directly from a USB memory device or SD memory card with Scan-to-Media. This makes document portability fast and easy.
- Reduce the file size of color documents with an easy-to-use High Compression
 JPEG 2000 PDF feature. This resolves the issue of large documents slowing down
 your network and the printing process.

Run Fast, Finish Strong

The system may be compact, but the paper handling is incredibly strong. Load the system with a wide variety of paper stocks and sizes, then use the internal finishing features to produce documents completely in-house.

- Produce professional and expertly finished documents without taking up excessive floor space. Both systems offer an internal finisher, which offers automatic stapling and optional 2- or 3-hole punching.
- Create spreadsheets, newsletters or other large documents on 11" x 17" paper using the copy or print functions.
- Push workgroup productivity to new heights with an ample paper supply. The system offers a total paper capacity up to 1,600 sheets, a standard 50-Sheet Automatic Reversing Document Feeder and up to five paper sources.
- Produce full-color or black & white postcards, posters and report covers on a variety of thick or unique paper stocks. Print onto envelopes directly from the envelope feeder tray or bypass tray.

Discover True System Versatility

The multi-functional power of the Lanier LD620C/LD625C allows small offices and workgroups to add full-color capabilities and replace up to four separate devices with one versatile solution.

- Send fax documents quickly and easily with an optional Super G3 fax modem and 2,000 Quick Dials.
- Cut costs with advanced LAN, IP (T.38) and Internet (T.37) faxing technologies.

Simplified System Management

- Monitor and manage the Lanier LD620C/LD625C from a remote location using advanced Web tools. Administrators can view system details, settings and supply status from a standard Web browser.
- Optimize your most critical workflows with the Embedded Software Architecture[™],
 a Java-compatible Software Development Kit (SDK) that makes it easy to create
 unique system and network management applications.



Forward incoming faxes to an e-mail address or folder, so users can receive important documents no matter where they are.

OK	Cancel	
Machine Action	When Limit	t is Reached
■ Machine Action	When Limit	is Reached : Stop Job
Print Volume U	se Limitatio	n: Unit Count Setting
■ Copier		
Calor	: 200	(0-200)
Black & White	9: 1	(0-200)
■ Printer		
Color	: 10	(0-200)
Black & White	e : 1	(0-200)

Set output limits and control costs on an individual or group level with the Quota Setting feature.



Minimize network congestion and transmit files more efficiently with Scan-to-URL. This feature stores documents on the Hard Disk Drive and allows recipients to view and download them from any Web browser.

Connect to Powerful Workflow Capabilities

The Lanier LD620C/LD625C are loaded with time-saving features that give end-users entirely new capabilities that allow them to work faster, smarter and more efficiently.

- Create full-color or black & white documents from a PDF or JPEG attachment by sending an e-mail directly to the system using the innovative Mail-to-Print feature.
- Save time and minimize network traffic with PDF Direct Print, a convenient capability that allows end-users to print PDFs without having to open them in Adobe® Acrobat®.
- Charge specific print jobs to specific clients, workgroups or job numbers using the advanced but easy Classification Code feature.
- Connect any PictBridge®-enabled digital camera to the system and print brilliant, full-color photos in seconds.

Lanier Managed Document Services

Lanier's Managed Document Services (MDS) is a powerful way to streamline your document management environment. MDS enables control of output-related costs and assets and optimizes the fleet. Through on-site and off-site services, MDS improves workflow, productivity and end-user experiences.

- Control expenses with the Lanier LD620C/LD625C, which provide a powerful combination of high-productivity, long-lasting reliability and low total cost of ownership (TCO).
- Consolidate copying, printing, scanning and document management into a single device, with a smaller footprint and one set of consumables.
- Place the right device for the right application with these systems and others
 —all part of our extensive line of Lanier products.


Protect Documents, Data and Passwords

Select the following security features of the Lanier LD620C/LD625C to help you safeguard both printed and electronic documents.

- Provide strong lines of defense for sensitive information with the standard DataOverwriteSecurity System (DOSS). This robust security feature automatically overwrites the hard drive after each job. Standard HDD encryption lets you protect valuable data, even if the hard drive is stolen.
- Guard against unauthorized document viewing with encrypted PDF transmission. This feature encrypts PDF data prior to transmission via Scan-to-Email and Scan-to-Folder.
- Protect e-mail transmissions with advanced encryption technology and defend against unauthorized network interception with S/MIME (Secure/Multipurpose Internet Mail Extensions).
- Print color documents without worrying about costly overuse. Several levels
 of authentication let you confirm user identity and control access to color,
 scanning and other functions.



Print from mobile devices to HotSpot Printers. Simply forward e-mails from PDAs or Internet-enabled cell phones, with or without attachments, to the printer's e-mail address. No drivers required!



Create one-click, preset graphical icons to repeat a particular job at any time—without having to reprogram the setup.

The Total Green Office Solution





Lanier continues its long-standing commitment to developing office solutions with environmentally friendly and superior energy- and supply-saving features, without compromising productivity.



LD620C/LD625C

GENERAL SPECIFICATIONS

Printing Process Dry Electrostatic Transfer with Dry Dual Component Magnetic Brush Development

System; 4-Drum Method

LD620C: 20-ppm BW & Full-Color; LD625C: 25-ppm BW & Full-Color **Output Speed** (Copy/Print) Warm-Up Time Less than 22 seconds (from Power On) Less than 10 seconds (from Sleep Mode) Full-Color: 9.2 seconds; BW: 6.4 seconds First Copy Time

Copy Resolution 600 x 600 dpi

Automatic Reversing Document Feeder Document Feeder (ARDF) (Standard)

Original Capacity 50 sheets 5.5" x 8.5" to 11" x 17"

Paper Size Simplex: 11 lb. to 34 lb. Bond Paper Weight

(40 – 128 g/m²); Duplex: 14 lb. to 28 lb. Bond

 $(52 - 105 \text{ g/m}^2)$ **Exposure Glass** Up to 11" x 17" Up to 999 copies

Quantity Indicator Up to 11" x 17" Copy Size Standard: 2 x 250 sheets + 100-Sheet Bypass Tray; Maximum: 1,600 sheets Input Capacity

Standard: 500 sheets (Letter); 250 sheets (Legal/Ledger); **Output Capacity**

Maximum: 650 sheets (with 500-Sheet std. Exit Tray, 50-Sheet Side Tray and 100-Sheet One-Bin Tray)

Paper Sizes Standard Tray 1 and Tray 2: 7.25" x 10.5"

to 11" x 17"; Custom Sizes (Tray 1 and Tray 2): 7.17" x

5.83" (182 x 148 mm) to 11.69" x 17"

(297 x 432 mm); Bypass Tray: 5.83" x 3.55" to 23.62" x 12" (305 x 600 mm)

Standard Tray #1: 16 – 68 lb. Bond/ 140 lb. Index (60 – 256 g/m²); Paper Weights

Standard Tray #2: 16 – 45 lb. Bond/ 90 lb. Index (60 – 169 g/m²); Bypass Tray: 14 – 68 lb. Bond/140 lb. Index

(52 - 256 g/m²);

Duplex Unit: 16 – 28 lb. Bond (60 – 105 g/m²) Plain paper, laser printer qualified Paper Types

transparencies, labels and envelopes Auto Duplex Standard

Zoom Preset 25% – 400% in 1% increments; 93%,

Reduction and 85%, 78%, 73%, 65%, 50%, 25% and Enlargement Ratios 400%, 200%, 155%, 129%, 121% Dimensions (WxDxH) 23.2" x 26.7" x 33.3" (587 x 676 x 845 mm)

220.5 lbs. (100 kg) Weight Power Requirements 120V, 60Hz, 12A Power Consumption 1600 Watts or less TEC Value*

LD620C: 1.00kWh LD625C: 1.27kWh

*Tested in accordance with US EPA TEC Test Procedure

OTHER COPIER FEATURES

Auto Color Selection (ACS), Auto/Manual Density Control, Copy Mode – Photo Type Selection (Printed, Glossy, & Copied Photo), Combine Mode, Shift/Erase/Margin, Cover/Slip/Chapter Sheets, Color Creation Modes, Image Creation Modes, Stamps/Numbering, Color Adjustment, Image Adjustment, Image Rotation, Job Program (10), User Codes (500), Job Preset (8), Sample Copy, Batch Mode, Quota Settings & SADF Mode

SECURITY SPECIFICATIONS

Standard DataOverwriteSecurity Unit (DOSS) Type I - Security feature that overwrites latent data on the system's hard drive after copy, scan, fax and print jobs.

Standard HDD Encryption Unit Type A – This function encrypts the system's hard drive using 256 bits (AES) to protect against

Other Security Features – SNMP v3 and Data Encryption (password/address book); Locked (Secure) Print; User Codes; Basic Authentication; WPA (Wi-Fi Protect Access Support); IPsec Communication; Windows/LDAP/Kerberos Authentication; 802.1x Wired Authentication; SSL Communication; SSL over SMTP; S/MIME; Network Protocol On/Off; IP Filtering (Access Control) and more

PRINT CONTROLLER (STANDARD)

CPU Mobile Intel Celeron Processor @ 600MHz 1.5 GB RAM (Maximum) & 160 GB HDD Standard (Shared)

Max. Print Speed

LD620C: 20-ppm BW & Full-Color; LD625C: 25-ppm BW & Full-Color PCL5c, PCL6, XPS; Genuine Adobe® PostScripte3" (Optional), Includes PDF Direct Print Page Description Languages

Max. Print Resolution 1200 x 1200 dpi

Standard Interfaces 10Base-T/100Base-TX Ethernet (RJ-45), USB 2.0/SD Slot, USB 2.0 Host I/F

Optional Interfaces IEEE 802.11a/b/g Interface Unit Type J, IEEE 1284 Interface Board Type A, Gigabit Ethernet Type B

Network Protocols TCP/IP (IPv4, IPv6), İPX/SPX 45 Intellifonts, 13 International Fonts Fonts for PCL

Fonts for PS3 136 Roman Network Operating

Systems

Utilities

Windows 2000/XP/Vista/7/Server 2003/ Server 2008/Server 2008R2, Novell NetWare 3.12,3.2,4.1,4.11,5.0,5.1,6,6.5 or later,

UNIX' filters for Sun Solaris, HP-UX, SCO OpenServer, RedHat Linux, and IBM AIX, MAC OS X v10.2 or later; SAP R/3, NDPS Gateway, IBM iSeries AS/400 using OS/400 Host Print Transform

SmartDeviceMonitor for Admin and Client, Web SmartDeviceMonitor,

Web Image Monitor

¹For UNIX support, visit www.lanier.com/downloads

OTHER PRINTER FEATURES

Sample/Hold/Stored and Locked Print, Classification Code, PANTONE® Color Palette, Black Over Print, CLP Simulation, PictBridge™ Support, WSD Printer, Bonjour Support

SCANNER SPECIFICATIONS (STANDARD)

From 100 to 600 dpi (1200 dpi for TWAIN);

Default Setting: 200dpi 44-ipm BW; 44-ipm Full-Color Scanning Speed (@200 dpi via ARDF) Main Scan: 11.7" (297 mm), Sub Scan: 17" (432 mm) Scan Area

Contact Glass: 11" x 17", 8.5" x 14", 8.5" x 11", 5.5" x 8.5" Scan Size

BW: TIFF (MH, MR, MMR), Grayscale; Compression

Method Full-Color: JPEG Standard: BW Text/Line Art. BW Text. Scan Mode BW Text/Photo, BW Photo, BW Grayscale,

FC Text/Photo, FC Photo
Scan-to-Email (with LDAP support): Scan-to Modes

Scan-to-Folder (SMB/FTP/NCP); Scan-to-URL; Network TWAIN Scanning; Scan-to-Media (USB/SD, optional); WSD Scanner (for Vista) Supported

DOCUMENT SERVER SPECIFICATIONS

Capacity 160 GB (shared with other functions)

Max. Stored 2.000 documents Documents Max. Pages per 1,000 pages

Document 6,000 Pages Max. Pages of all Stored Documents

FACSIMILE SPECIFICATIONS (OPTIONAL)

Fax Option Type C2551

Scan Speed

Options

ITU-T (CCITT) G3 Circuit PSTN, PBX

Resolution 200 x 100 dpi, 200 x 200 dpi, 400 x

400 dpi (with optional SAF memory) 33.6K – 2,400bps with Automatic Shift Modem Speed

Down
Compression Method MH, MR, MMR, JBIG
Transmission Speed G3: Approx. 2 seconds/page (w/JBIG

compression); G3: Approx. 3 seconds/ page (w/MMR compression) 40 pages/minute (Standard Mode);

38 pages/minute (Detail Mode); 20 pages/minute (Super Fine Mode) 2,000 Quick Dials, 100 Group Dials Auto Dialing

(200 locations each) 4 MB (approx. 320 pages); Memory Capacity

Maximum 28 MB (approx. 2,240 pages) Additional Modes Internet Fax (T.37), IP Fax (T.38), LAN Fax, Fax Forward to E-mail/Folder, LDAP Support,

Detection of Misplaced Documents &

Double Check Destination Handset Type 1018, Memory Unit Type B

32MB (SAF Memory)

HARDWARE ACCESSORIES

Paper Feed Unit (PB3070)

Paper Capacity 500 sheets x 1 Tray Paper Sizes 7.25" x 10.5" to 11" x 17" Paper Weights 16 – 28 lb. Bond (60 – 105 g/m²) Dimensions (WxDxH) 21.7" x 20.5" x 5.4"

(550 x 520 x 137 mm)

The Caster Table is required with the 500 x 1 Paper Feed Unit (PB3070).

Paper Feed Unit (PB3030)1

Paper Capacity 500 sheets x 2 Trays 7.25" x 10.5" to 11" x 17 Paper Sizes 16 – 28 lb. Bond (60 – 105 g/m²) Paper Weights Dimensions (WxDxH) 21.7" x 20.5" x 10.7" (550 x 520 x 271 mm)

Cabinet Type FAC431

Envelope Feeder Tray (EF3010)

5.5" x 8.5" to 11" x 17" Com10, Monarch, C5, C6 DL Paper Sizes

Envelope

14 - 68 lbs. Bond (60 - 256 g/m²) 250 sheets (8.5" x 11" to 11" x 17") 150 sheets (5.5" x 8.5") Paper Weight Paper Capacity

Approximately 40 envelopes

(depending on envelope thickness/quality)

Internal 500-Sheet Finisher Type C2550

14 – 34 lb. Bond (52 – 128 g/m²)
14 – 34 lb. Bond (52 – 128 g/m²)
500 sheets (8.5" x 11")
250 sheets (8.5" x 14" or larger)
50 sheets (8.5" x 14" or larger)
30 sheets (8.5" x 14" or larger)
7.25" x 10.5" to 11" x 17"
Landscape: Top Left Corner, Bottom Left
Corner, 2-Top Sided, and 2-Left Sided;
Particity Top Left Corner Bettom Left Paper Weights Stack Capacity Staple Capacity

Staple Paper Sizes

Staple Positions Portrait: Top Left Corner, Bottom Left

Corner, 2-Top Sided, and 2-Left Sided Dimensions (WxDxH) 19.5" x 20.7" x 8.4" (495 x 525 x 214 mm)

2/3-Hole Punch Unit Option (PU3010NA) available for Internal Finisher.

Internal Shift-Sort Tray (SH3030)

5.5" x 8.5" to 12" x 18" 250 sheets Paper Sizes Paper Capacity

Paper Weights 14 - 68 lb. Bond/140 lb. Index

(52 – 256 g/m²) Dimensions (WxDxH) 16.9" x 18.8" x 4.2" (431 x 477.5 x 107 mm)

Internal Shift-Sort and/or Inner One-Bin Tray cannot be installed with the 500-Sheet Internal Finisher

Inner One-Bin Tray (BN3060)

5.5" x 8.5" to 11" x 17" Paper Sizes

Bin Capacity 100 sheets

16 – 28 lb. Bond (60 – 105 g/m²) Paper Weights

Dimensions (WxDxH) 16.9" x 19.6" x 4.4"

(429 x 497 x 113 mm)

Side Tray Type C2550

Paper Sizes Paper Capacity 5.5" x 8.5" to 11" x 17" 50 sheets

Paper Weights 16 - 28 lb. Bond (60 - 105 g/m²)

Dimensions (WxDxH) 18.9" x 18.9" x 6.7" (480 x 480 x 170 mm)

Please note either the Cabinet Stand or one of the paper options must

be installed.

ADDITIONAL ACCESSORIES

Caster Table Type B, PostScript3 Unit Type C2551, Camera Direct Print Card Type I, Key Counter Bracket Type H, File Format Converter Type E, Optional Counter Interface Unit Type A, USB 2.0/SD Slot Type G, Handset Type 1018, IEEE802.11 a/b/g Wireless Interface Type J, HotSpot Printing, and more

CONSUMABLES*

Black Toner 10K Cartridge 5.5K or 9.5K Cyan, Magenta &

Yellow Toner Cartridge

*Toner yields based on 5% coverage

For maximum performance and yield, we recommend using genuine Lanier parts and supplies















Lanier Five Dedrick Place West Caldwell NJ 07006 2011 Lainer is a registered trademark of Rioch Americas Corporation. All rights reserved. All other trademarks are the property of their respective owners. The content of this document, and the appearance, features and specifications of Lainer products and services are subject to change from time to time without notice. Profounds are shown with optional features. While care has been taken to ensure the accuracy, completeness or adequacy of the information, Lainer makes on perspectation or owneranties about the accuracy, completeness or adequacy of the information contained herein, and shall not be liable for any errors or omissions in the experse younger and shall not be liable for any errors or omissions in the experse younger and shall not be liable for any errors or omissions in the materials. Actual results will vary depending upon use of the products and services, and the conditions and factors affecting performance. The only warranties for Lainer products and services are as set forth in the experse swarranty statements accompanying them.